Thank you for purchasing the Universal Xpress Car Kit. You are one step closer to experiencing XM Satellite Radio. The Universal Xpress Car Kit works with all of the Xpress family of radios including the Xpress^{EZ}, the Xpress, the Xpress^{R} and the Xpress^{RC}. Throughout the guide we'll refer to them as the Xpress family of radios.

Works with:



Xpress^{EZ} Xpress Xpress^{R} Xpress^{RC}

What's in the Box?

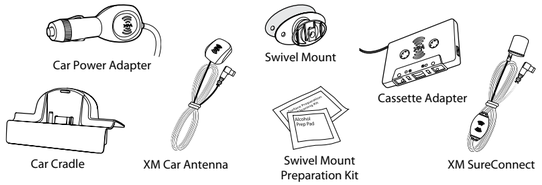

Step 1: Plan the Installation

1 Select an area on the dashboard you want to place the car cradle. This is where you will install the swivel mount.

2 Determine if you want the swivel mount installed vertically or horizontally. See *Step 3: Install the Swivel Mount* for more information.

TIP! An adhesive pad is used to mount the swivel mount to the dashboard. The adhesive requires 24 hours to cure. Make sure you provide yourself the proper amount of time to install your car kit. See *Step 3: Install the Swivel Mount* for more information.

3 Determine which connection method you plan to use in order to receive the XM signal:

- XM SureConnect (included)
- Cassette adapter (Included)
- Audio Cable (Sold Separately)
- FM Direct Adapter (Sold Separately)

WARNINGS:

- When using this product it is always important to keep your eyes on the road and hands on the wheel. Not doing so could result in personal injury, death, and/or damage to your Xpress family radio, accessories, and/or to your vehicle or other property.
- Your Xpress family radio should be placed in your vehicle where it will not interfere with the function of safety features, e.g., deployment of airbags. Failure to correctly place your Xpress family radio may result in injury to you or others if the unit becomes detached during an accident and/or obstructs the deployment of an airbag.

Step 2: Mount the XM Car Antenna

1 Place the car cradle on the dashboard.
You will connect it to the swivel mount later on.

TIP! Make sure the door does not pinch the cable when closed.
TIP! Always cross the weather seals at the lowest point possible to reduce water leaks.
TIP! Always hand wash or use brushless or touch-free car washes to avoid damaging the XM SureConnect.

2 Select a suitable location on the outside of your car for the antenna.
For example, on the roof near the windshield or rear window.

TIP! When selecting a location, consider any accessories that your car has, such as a luggage rack, and how often you use the accessories. Select a location where the antenna won't be covered or blocked as this could interfere with signal reception.

3 Gently place the antenna in the location you selected. The antenna has a strong magnet that sticks to any metallic surface.

4 Route the antenna cable.
If you placed the antenna on the **front** of the car:

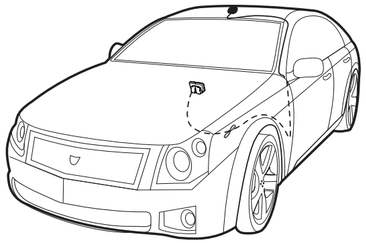

- Route the cable across the top of the windshield.
- **Gently** pry up the rubber weather seal and tuck the cable underneath it.
- Follow the weather seal down to the door jam.
- Tuck the cable into the door jam and up to the dash, or under the carpet, and route the cable to the car cradle.

If you placed the antenna on the **rear** of the car:

- Route the cable across the top of the rear window.
- **Gently** pry up the rubber weather seal and tuck the cable underneath it.
- Route the cable into the trunk and through any existing wire passages or cargo passages to the rear seats.
- Tuck the cable under the door jam trim, or under the carpet, and route the cable to the car cradle.



TIP! When routing the cable:

- Make sure any extra cable does not interfere with normal car operation.
- Make sure there are no knots or twists in the cable as these can affect signal reception and damage the cable.
- Include enough slack in the cable to accommodate open doors or trunk lids.
- To fasten the cable, use electrical tape or zip ties, and secure the cable in areas where hinges don't pinch the cable.
- Hide extra cable in the trim.

Step 3: Install the Swivel Mount

CAUTION! The adhesive used with the swivel mount may make it difficult to remove the swivel mount later. Do not install the swivel mount on leather surfaces, and make sure the air temperature is at least 60°F (15°C).

1 Select whether you want to install the swivel mount vertically or horizontally on the dashboard.



2 Locate a flat surface for the swivel mount on the dashboard. Make sure there is ample room for the car cradle and radio when installed.

3 Use the alcohol pads in the swivel mount preparation kit to clean the surface. Let it dry thoroughly.

4 Remove the adhesive liner from the swivel mount.

5 Position the swivel mount where you want it, then press and hold the swivel mount in place for 30 seconds.

IMPORTANT! Let the adhesive cure for 24 hours before connecting the car cradle and radio to the swivel mount.

6 Turn the swivel to accommodate the car cradle and radio. Adjust the tension by turning the center screw.



TIP! To remove the swivel mount, warm the adhesive pad with a hair dryer for several minutes to soften the adhesive, and then carefully lift the adhesive pad with your fingers or a spoon. You can reinstall the swivel mount using the extra adhesive pad in the swivel mount preparation kit.

Step 4: Connect Your Xpress Family Radio

Connecting the Car Cradle to the Swivel Mount

To connect the car cradle **vertically** onto the swivel mount, slide the car cradle down onto the swivel mount. The retainer tab should be inserted into the groove on the **back** of the car cradle. Make sure it snaps firmly in place.

To connect the car cradle **horizontally** onto the swivel mount, slide car cradle onto the retainer tab. The retainer tab should be inserted into the groove on the **base** of the car cradle.

Receiving the XM Signal through Your Car Stereo

There are several ways to receive the XM Signal through your car stereo.
Select the one that best meets your needs (Audio output cable and FM Direct Adapter are sold separately):

- **Cassette Adapter** (Included) Use a cassette adapter if your car's stereo system has a built-in cassette player.
- **Audio Output Cable**: If your car stereo has an audio input jack, you can plug this cable into it to receive audio reception.
- **XM SureConnect**: (Included) You can listen to your Xpress family radio through your car's stereo system by using the built-in FM modulator in your Xpress radio and the XM SureConnect. Simply find an unused FM frequency on your car stereo system, and tune your Xpress family radio into that same frequency. To install the XM SureConnect, follow the XM SureConnect installation instructions.
- **FM Direct Adapter**: The FM direct adapter connects your Xpress family radio directly to your car's stereo system and antenna. You can listen to your Xpress family radio through your car's stereo system by using the built-in FM modulator in your Xpress family radio. If you choose this option, have the adapter professionally installed.

Plugging Everything In

1. Plug the antenna into **ANT IN** on the car cradle.
   If you are using the XM SureConnect, see the XM SureConnect installation guide to connect XM SureConnect to the car cradle and antenna.
2. Plug the car power adapter into **DC IN** on the car cradle.
3. If you selected a cassette adapter (included) or the audio output cable, plug this option into **AUDIO OUT**.
4. Make sure your Xpress radio is placed securely in the car cradle, then turn on your Xpress radio.
5. If using either the XM SureConnect or FM direct adapter, follow the instructions in Step 5 to find/select an unused FM frequency.

TIP! If you experience interference when listening to an AM channel, unplug the power to your Xpress family radio to reduce interference.

Audio Out Option

Cassette or audio cable

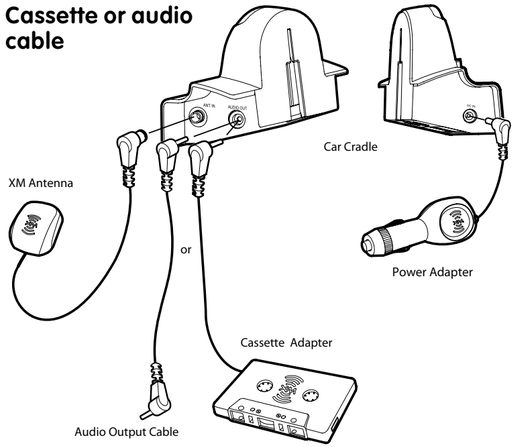

XM SureConnect Option

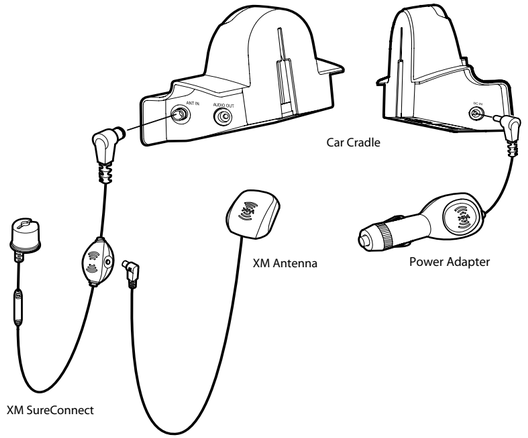

Universal Xpress Car Kit Installation Guide

Xpress EZ Xpress

Xpress R Xpress RC

Step 5: Finding an FM Frequency

If you choose either the XM SureConnect or FM direct adapter, your Xpress family radio uses a built-in FM modulator to receive XM Satellite Radio programming on an unused FM frequency.

Finding an unused FM frequency is simple:

1. Press **Menu**.
2. Press the dial to select **FM Frequency**.
3. Turn the dial to scroll through the FM frequencies.
   By default, the FM modulator is **OFF**.
4. To select a frequency, press the dial.
5. Tune your car radio to the selected FM frequency.

TIP! Go to http://www.xmradio.com/fmlocator/ and search for unused FM frequencies in your listening area.

NOTE! If the built-in FM modulator does not provide satisfactory performance, try one of the other options.

Audiovox 12 Month Limited Warranty

AUDIOVOX ELECTRONICS CORPORATION (the Company) warrants to the original retail purchaser of this product that should this product or any part thereof, under normal use and conditions, be proven defective in material or workmanship within 12 months from the date of original purchase, such defect(s) will be repaired or replaced with new or reconditioned product (at the Company's option) without charge for parts and repair labor.

To obtain repair or replacement within the terms of this Warranty, the product is to be delivered with proof of warranty coverage (for example, dated bill of sale), specification of defect(s), transportation prepaid, to an approved warranty station or the Company at the address shown below.

This Warranty does not extend to the elimination of externally generated static or noise, to costs incurred for installation, removal or reinstallation of the product, damage to speakers, accessories, or vehicle and home electrical systems, malfunction of satellite transmissions, repeater signal, or receiver unit.

This Warranty does not apply to any product or part thereof which, in the opinion of the Company, has suffered or been damaged through alteration, improper installation, mishandling, misuse, neglect, accident, or by removal or defacement of the factory serial number/bar code label(s).

THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY PURCHASER FOR THE PRODUCT.

This Warranty is in lieu of all other express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN A PERIOD OF 48 MONTHS FROM THE DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights and you may also have other rights which vary from state to state.

USA: AUDIOVOX ELECTRONICS CORPORATION, 150 MARCUS BLVD., HAUPPAUGE, NEW YORK 11788 (1-800-645-4994)
CANADA: CALL 1-800-645-4994 FOR LOCATION OF WARRANTY STATION SERVING YOUR AREA

FCC Statement

The power cable supplied with your device has ferrite beads at one or both ends. It is the responsibility of the user to use the power cable with the ferrite beads.

The user is cautioned that changes or modifications not expressly approved by XM Satellite Radio Inc. can void the user's authority to operate this device. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the installation instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna of the affected receiver.
- Increase the separation between the XM equipment and the affected receiver.
- Connect the XM equipment into an outlet on a circuit different from that to which the affected receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING! The FCC and FAA have not certified this Satellite Radio Receiver for use in any aircraft (neither portable nor permanent installation). Therefore, XM Satellite Radio cannot support this type of application or installation

XMC-10A

Audiovox Electronics Corporation
150 Marcus Blvd.
Hauppauge, New York 11788
U.S.A.
1 800 645 4994

www.audiovox.com

XM and related logos are registered trademarks of XM Satellite Radio Inc. All other trademarks are property of their respective owners.

©2008 Audiovox Electronics Corporation. All rights reserved.